

EFS - 3080





## EFS - 3080

Applicable door width - EN 2

Floor Spring  
 closing force EN 2

### Specifications

- This cylinder is made of high quality cast iron.
- The closing force, door-closer speed and blocking action are stepless adjustable.
- Provided with door stop function and explosion-proof device. Suitable for wooden, glass and alu etc. all kinds of doors.
- Max. opening angle in each direction : 120°
- Controllable closing angle : 90° +15° -0°
- The width inside the frame can be adjusted by 2.5mm, length by 10mm and height 10mm.
- It adopts low temperature anti-freezing hydraulic oil and the application ambient temperature can reach: -30°C – +50°C.

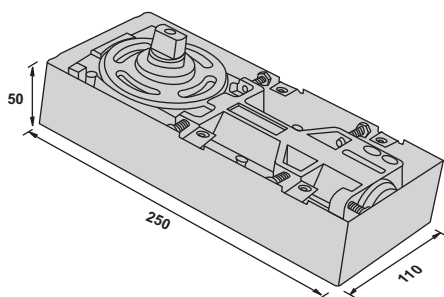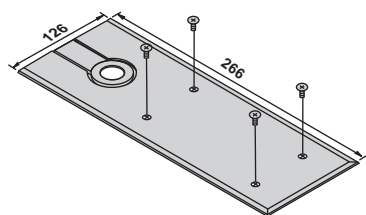

Special Features		EFS 3080
Closing Force	Size according to EN * (with closing force display, continuously adjustable)	2
Door Width	Size according to EN	≤ <b>850</b>
Door Weight	Max. (in kgs)	80
Dimensions including mounting plate	MM Length	250
	MM Depth	110
	MM Height	50
Hold Open 90° or 105°	* Not fire rated (continuously adjustable)	○
Door Opening Angle		120°
Closing Speed ( adjustable)		●
Latching Speed ( adjustable)		●
Back Check		—
DIN Left / Right		●
Tested According to EN		—

● Yes    ○ Option    — No